

# **LOAD CAPACITY**

Certified load capacity 1500 Kg/m<sup>2</sup> (307 lbf/ft<sup>2</sup>).





### **COMPOSITION**

Cover built with aluminum slat that it's is resisting to corrosion from salt, water and gravel. Steel chain and bearings are galvanized to resist to standard conditions.

# **STORAGE SYSTEM**

Storage system located at the head of the pit complete with guides for cover storage. A 42' cover is stored in 2,5'. Tandem version for pits up to 138'. The system can fully or partially close the pit quickly and safely.



### **SAFETY IN THE PIT**

The opening/closing of the cover pit can be stopped with the pressure of the emergency button inside the pit. The driving shaft allows to open the cover if the motor goes down.



The pit cover can be partially removed if it's necessary in case of emergency.




REMOVABLE SLATS



ONLY 2 MM BETWEEN THE FLOOR AND THE SLATS.

#### SAFETY ON THE CONTROL PANEL

The operator can start up the system by closing or opening the pit in a few seconds. The open and close button must be held down.

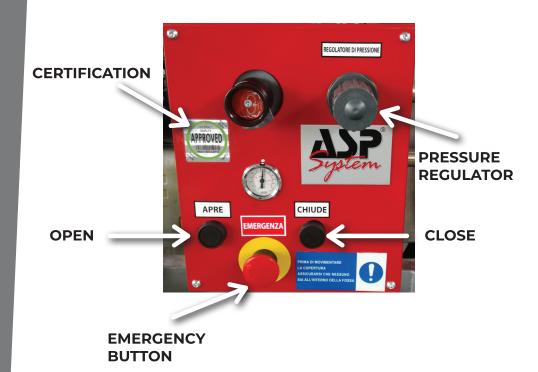

The system can fully or partially close the pit quickly and safely.

# **Truck Training Center Italy S.r.l.**

Via Louis Bleriot, 2 25018 Montichiari (Brescia - Italy) Tel. +39.030.9661711 www.trucktrainingcenter.it info@trucktrainingcenter.it